


CUSTOMER SUPPLIED FUSED DISCONNECT
460 VAC, 3 Ø, 60 Hz, 15 AMP or
230 VAC, 3 Ø, 60 Hz, 30 AMP
(SPECIFY VOLTAGE AT TIME OF ORDER)

ON/OFF FAN MOTOR STARTER BOX
MUSTANG SUPPLIED
(SPECIFY VOLTAGE AT TIME OF ORDER)

Ø8" x Ø6" x Ø6" WYE

CUSTOMER SUPPLIED CONDUIT AND CABLE

CUSTOMER SUPPLIED
FLEXIBLE ARMORED CABLE
OR FLEXIBLE CONDUIT

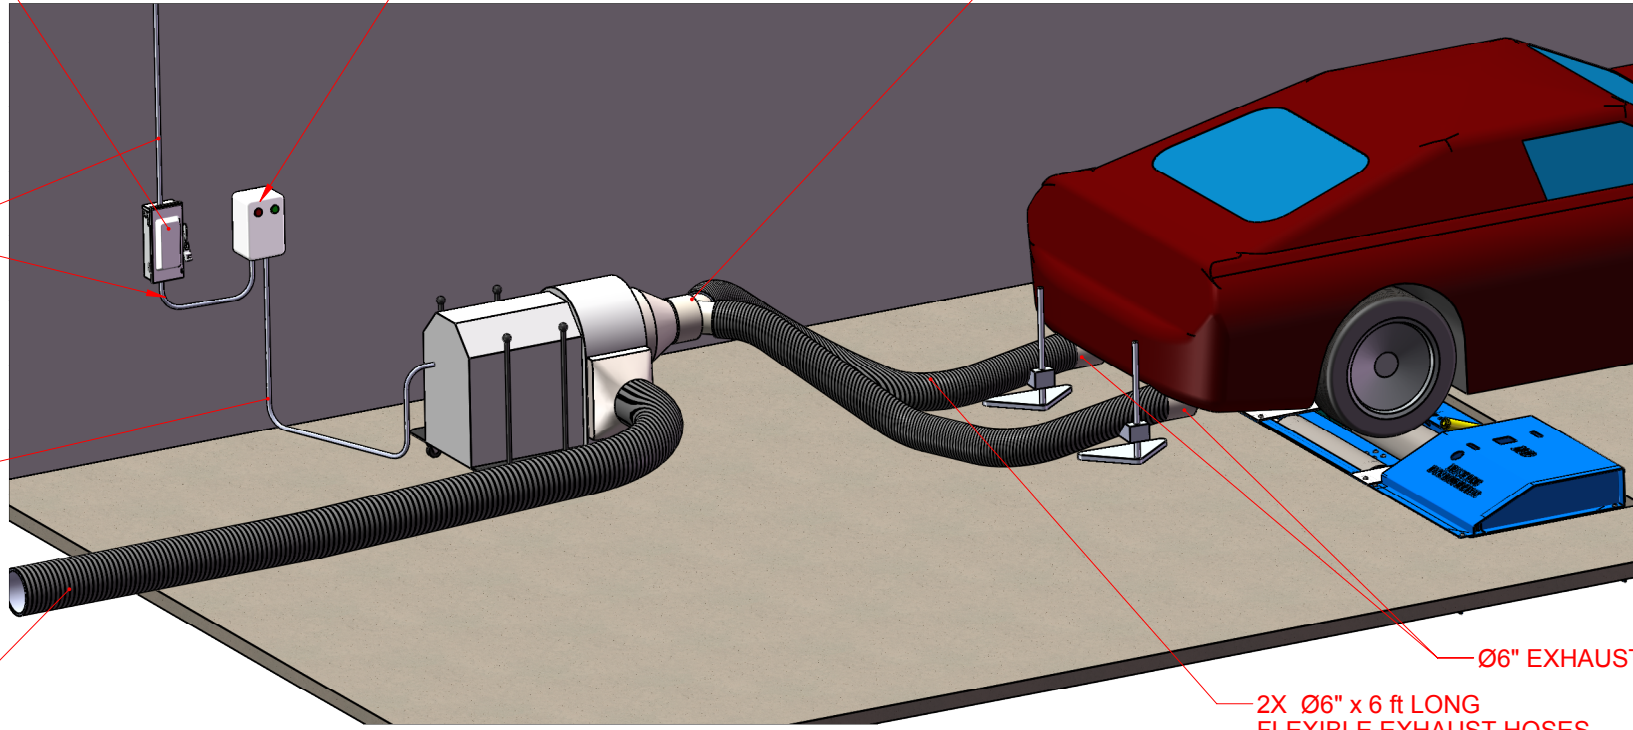

Ø8" x 10 ft LONG
FLEXIBLE EXHAUST HOSE


FOR VEHICLES WITH DUAL EXHAUST

Ø6" EXHAUST PIPE ADAPTER
2X Ø6" x 6 ft LONG
FLEXIBLE EXHAUST HOSES

EXHAUST EXTRACTION BLOWER
4,000 CFM @ 6 in.w.g.

HOSE STORAGE POSTS

BLOWER UNIT MOBILITY CASTERS

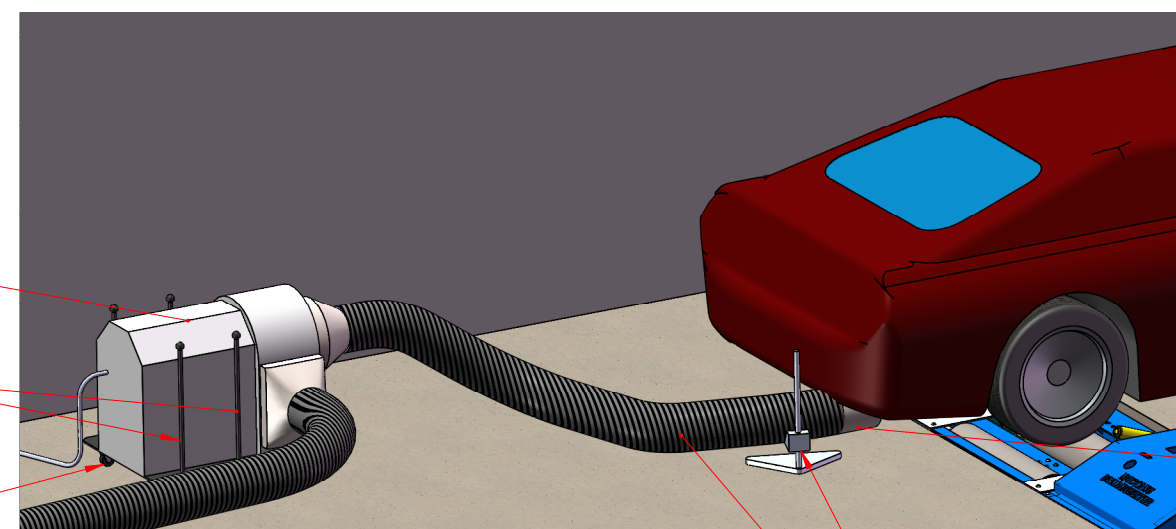

FOR VEHICLES WITH SINGLE EXHAUST

EXHAUST HOSE SUPPORT

Ø8" x 8 ft LONG
FLEXIBLE EXHAUST HOSE

Ø8" EXHAUST PIPE ADAPTER

A	PROP	RELEASE	NJK	08SEP20
REV	ECN	REVISION	BY	DATE

THIS DOCUMENT IS THE PROPERTY OF MUSTANG DYNAMOMETER AND IS DELIVERED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE DISCLOSED, REPRODUCED IN WHOLE OR IN PART, OR USED FOR MANUFACTURE FOR ANYONE OTHER THAN MUSTANG DYNAMOMETER WITHOUT ITS WRITTEN CONSENT, AND THAT NO RIGHT IS GRANTED TO DISCLOSE OR SO USE ANY INFORMATION CONTAINED IN SAID DOCUMENT.
THIS RESTRICTION DOES NOT LIMIT THE RIGHT TO USE INFORMATION OBTAINED FROM ANOTHER SOURCE.

REF:

		2300 PINNACLE PKWY. TWINSBURG, OH 44087 PHONE: (330)963-5400 FAX: (330)425-3310				
DO NOT SCALE DRAWING <small>UNLESS OTHERWISE SPECIFIED</small>		TITLE: EXHAUST EXTRACTION SYSTEM EQUIPMENT LAYOUT				
TOL: INCH [MM] MACH. PARTS: .XX ± .01 [.25] .XXX ± .005 [.127] FAB. PARTS: .XX ± .06 [1.52] .XXX ± .005 [.127] ANGULAR ± 1°	DRAWN: NJK	DATE: 08SEP20	APP: NJK	DATE: 08SEP20	SCALE: 1:36	UNITS: IN[MM]
SIZE: B	DWG NO. 20063088	SHEET 1 OF 1	REV: A			

FILE LOCATION: M:\2006(0000-4999)\20063088